


## Product Features

- C**eiling Concealed Type
- C**ompact Design
- L**ow Noise Level
- O**uter-Rotor BLDC Motor
- N**etwork Control Available

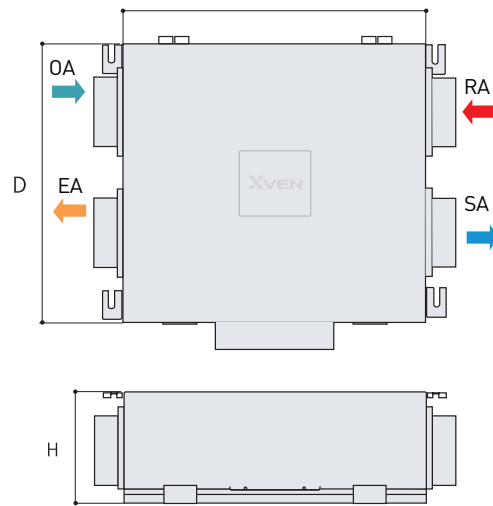

## Specifications

DIVISION			MODEL		
			SPC-150	SPC-250	SPC-350
Airflow	CMH	150	250	350	
Static Pressure	mmAq	10.0	11.0	12.0	
Temperature Effectiveness	Heating	%	73.5	70.0	68.0
	Cooling	%	62.0	58.8	58.5
Electrical Data	∅, V, Hz	1 ∅, 220V, 60Hz			
Power Consumption	W	70.0	114.0	150.0	
Filter		Pre-Filter			
Dimension	L(mm)	600	640	640	
	D(mm)	600	600	600	
	H(mm)	220	240	340	
Duct size	∅	125	125	150	
Weight	Kg	18.6	22.0	26.6	
Heat Exchange Element Material			Pulp		