


SPE Series Features

- C**eiling Concealed Type
- S**pecial Materials Air-to-Air Heat Exchanger
- T**otal Heat(Sensible&Latent) Recovery Unit
- P**re Filtering at OA and RA
- L**ow Noise Outer Rotor Motor

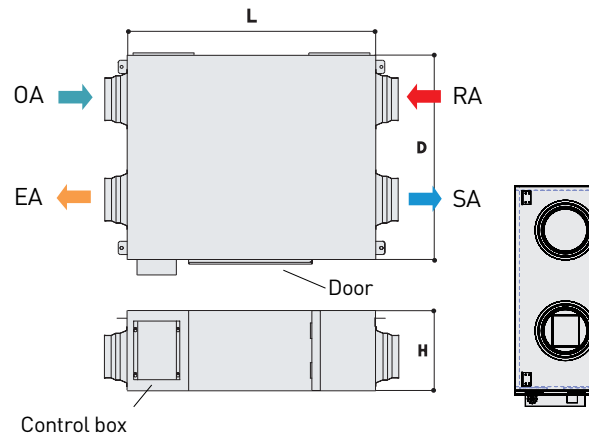

Specifications

DIVISION		MODEL						
		SPE-500	SPE-800	SPE-1000	SPE-1500	SPE-2000	SPE-2500	SPE-3000
Airflow	CMH	500	800	1,000	1,500	2,000	2,500	3,000
Static Pressure	mmAq	16.0	18.0	18.0	20.0	20.0	23.0	23.0
Temperature Effectiveness	Heating	%	70.0	70.0	70.0	70.0	70.0	70.0
	Cooling	%	60.0	60.0	60.0	60.0	60.0	60.0
Electrical Data	ø, V, Hz	1 ø, 220V, 60Hz / 3 ø, 380V, 60Hz						
Power Consumption	W	280	480	504	800	960	1,450	1,600
Filter		Pre-Filter						
Fan		Outer Rotor Sirocco						
Dimension	L(mm)	895	1,140	1,140	1,320	1,320	1,430	1,430
	D(mm)	860	860	860	1,265	1,265	1,680	1,680
	H(mm)	355	495	495	565	565	560	560
Duct Size	ø	200	250	250	300	300	350	350
Weight	Kg	38.0	72.0	72.0	115.0	120.0	140.0	145.0
Heat Exchange Element Material		Pulp for Total heat exchange PP for Sensible heat exchange						