


# HRV2000e Effectiveness Data

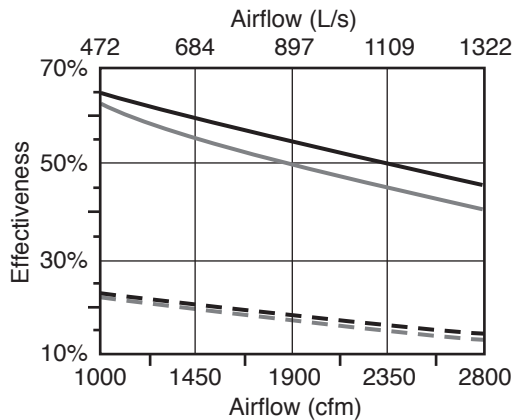

Based on equal amounts of outdoor air and return air.

- - - Total Effectiveness (Cooling)
- Sensible Effectiveness (Heating)
- n/a Latent Effectiveness (Heating)

Ratings outside the scope of the ARI Energy Recovery Ventilation Certification Program.

**Model Number: PHE500-15.4H-15.3S-0.11**

**Model Number: AHE500-15.4H-15S-0.14**

Type: Plate (Plate)

Nominal Airflow: 530 (530) scfm

Pressure Drop: 0.86 (0.30) inches

### Leakage Ratings

	Pressure Differential	EATR	OACF	Purge Angle or Setting
Test 1:	-5.00 (-3.00) inches	0% (0%)	1.00 (1.00)	N/A (N/A)
Test 2:	0.00 (0.00) inches	0% (0%)	1.00 (1.00)	N/A (N/A)
Test 3:	5.00 (3.00) inches	0% (0%)	1.00 (1.00)	N/A (N/A)

### Thermal Effectiveness Ratings at 0" Pressure Differential

	Sensible	Latent	Total
100% Airflow Heating Condition:	58% (52%)	0% (0%)	38% (34%)
75% Airflow Heating Condition:	63% (58%)	0% (0%)	42% (38%)
100% Airflow Cooling Condition:	49% (46%)	0% (0%)	19% (18%)
75% Airflow Cooling Condition:	55% (52%)	0% (0%)	21% (20%)

	Net Sensible	Net Latent	Net Total
100% Airflow Heating Condition:	58% (52%)	0% (0%)	38% (34%)
75% Airflow Heating Condition:	63% (58%)	0% (0%)	42% (38%)
100% Airflow Cooling Condition:	49% (46%)	0% (0%)	19% (18%)
75% Airflow Cooling Condition:	55% (52%)	0% (0%)	21% (20%)



Energy recovery component certified in accordance with ARI Standard 1060. Actual performance in packaged equipment may vary.