



High Efficiency Appliance



SPH - 150~350

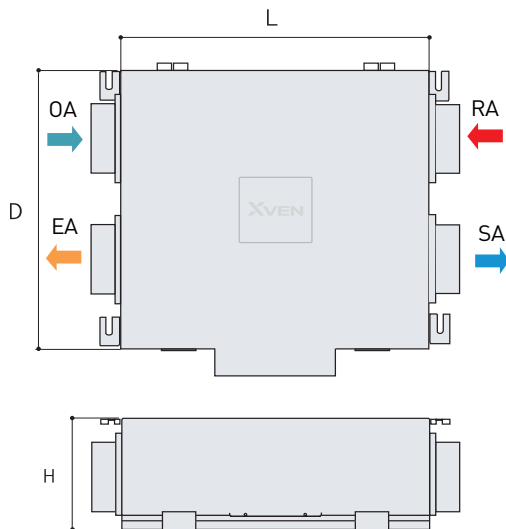

SPH- 500~1,000

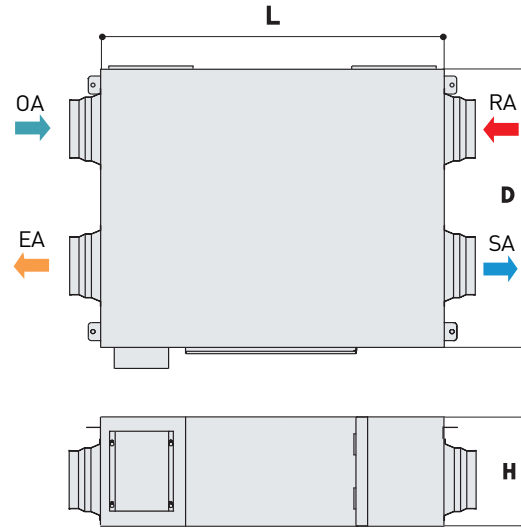

Specifications

DIVISION		MODEL						
		SPH-150	SPH-200	SPH-250	SPH-350	SPH-500	SPH-800	SPH-1000
Airflow	CMH	150	200	250	350	500	800	1,000
Electric Current	A	0.32	0.39	0.52	0.68	0.76	1.68	2.2
Power Consumption	W	70	85	114	150	167	370	485
Static Pressure	mmAq	10.2	12.0	13.8	14.6	17.8	20.0	18.4
Heating Temperature Effectiveness	%	86.4	88.2	84.3	82.1	78.5	78.8	75.9
Net Enthalpy Effectiveness	Heating	75.5	78.7	74.5	72.5	72.2	70.4	70.5
	Cooling	47.7	52.6	47.5	46.3	55.7	47.1	51.8
Noise	dB	40.0	40.0	40.0	40.0	40.0	40.0	40.0
Dimension(LxDxH)	mm	600×640×340	700×640×360	700×640×360	750×640×360	920×1,110×360	1,210×1,270×390	1,210×1,270×390
Weight	kg	29	36	36	42	76	93	93
Duct Size	ø	125	150	150	200	200	250	250
Electrical Data	ø, V, Hz	1ø, 220V, 60Hz						
Heat Exchange Element Material		Pulp						